



Purchase Order

Dispatch via Print

Wildlife Conservation
OK DEPARTMENT OF WILDLIFE CONSERVATION
ACCOUNTING DEPARTMENT
PO BOX 53465
OKLAHOMA CITY OK 73152

Purchase Order 3209007194	Date 05/03/2018	Revision	Page 1
Payment Terms 0 Days	Freight Terms Free on board at Destination	Ship Via Common	
Buyer Amber Thomas (580)	Phone 405/521-2112	Currency USD	

Ship To: OK DEPARTMENT OF WILDLIFE CONSERVATION
BYRON STATE FISH HATCHERY
71082 JEFFERSON ROAD
BURLINGTON OK 73722

Supplier: 0000465682
ANDREW LACKS
PO BOX 1272
NEWCASTLE OK 73065-1272

Bill To: OK DEPARTMENT OF WILDLIFE CONSERVATION
1801 N LINCOLN BLVD
OKLAHOMA CITY OK 731054998

Tax Exempt? Y **Tax Exempt ID:** 736017987

Line-Sch	Cat CD	Item Id	Description	Quantity	UOM	PO Price	Extended Amt	Due Date
----------	--------	---------	-------------	----------	-----	----------	--------------	----------

1-	1	72121400 / 1000017742	CONSTR:CAP-Below Statutory Amt, Simple Award, Construction Contract	1.0000	JA	22,750.0000	22,750.00	05/16/2018
----	---	-----------------------	--	--------	----	-------------	-----------	------------

The proposed contract is for all labor, materials, and equipment needed to replace the roof on the following five (5) structures at the Byron State Fish Hatchery.

The roof removal and replacement will include residence #1, residence #2, residence #3, residence #4, and garage roof (building #5).

Contract will include all labor, materials, and equipment to complete the following:

Residence #1 (roof is approximately 2,488 square feet):

- * Remove one (1) layer of asphalt shingles and underlayment material, down to wood deck, and dispose of in legal landfill
- * Install new 1.5" - 2" colored metal drip edge at all rakes and eaves
- * Replace any additional roof decking if needed
- * Install a layer of synthetic underlayment over wood decking
- * Install 50 year Malarkey Legacy shingles complete with all starter and ridge
- * Install two (2) new rubber pipe flashings and seal all penetrations
- * Replace eave fascia board as needed on structure
- * Install new flashing on north chimney
- * Remove south brick chimney below roof, cap and install 3" double wall pipe with cap collar and flashing
- * Install six (6) new painted slant back attic vents

Residence #2 (roof is approximately 1,283 square feet):

- * Remove one (1) layer asphalt shingles and underlayment material, down to wood deck, and dispose of in legal landfill
- * Install new 1.5" - 2" colored metal drip edge at all rakes and eaves
- * Remove three (3) old heated vents and replace decking
- * Replace any additional roof decking if needed
- * Install a layer of synthetic underlayment over wood decking
- * Install 50 year Malarkey Legacy shingles complete with all starter and ridge
- * Install one (1) new rubber pipe flashing, one (1) metal pipe flashing, and seal all penetrations
- * Replace eave fascia board as needed on structure
- * Install one (1) new painted slant back attic vent

Residence #3 (roof is approximately 1,937 square feet):

- * Remove one (1) layer asphalt shingles and underlayment material, down to wood deck, and dispose of in legal landfill
- * Install new 1.5" - 2" colored metal drip edge at all rakes and eaves
- * Remove one (1) old heated vent and replace decking
- * Replace any additional roof decking if needed
- * Install a layer of synthetic underlayment over wood decking
- * Install 50 year Malarkey Legacy shingles complete with all starter and ridge
- * Install two (2) new rubber pipe flashing, two (2) metal pipe flashing, and seal all penetrations

Authorized Signature

Mickerl Jones

Digitally signed by Mickerl Jones
Date: 2018.05.03 11:16:30 -05'00'



Purchase Order

Dispatch via Print

Wildlife Conservation
OK DEPARTMENT OF WILDLIFE CONSERVATION
ACCOUNTING DEPARTMENT
PO BOX 53465
OKLAHOMA CITY OK 73152

Purchase Order 3209007194	Date 05/03/2018	Revision	Page 2
Payment Terms 0 Days	Freight Terms Free on board at Destination	Ship Via Common	
Buyer Amber Thomas (580)	Phone 405/521-2112	Currency USD	

Ship To: OK DEPARTMENT OF WILDLIFE CONSERVATION
BYRON STATE FISH HATCHERY
71082 JEFFERSON ROAD
BURLINGTON OK 73722

Bill To: OK DEPARTMENT OF WILDLIFE CONSERVATION
1801 N LINCOLN BLVD
OKLAHOMA CITY OK 731054998

Supplier: 0000465682
ANDREW LACKS
PO BOX 1272
NEWCASTLE OK 73065-1272

Tax Exempt? Y **Tax Exempt ID:** 736017987

Line-Sch	Cat	CD / Item Id	Description	Quantity	UOM	PO Price	Extended Amt	Due Date
----------	-----	--------------	-------------	----------	-----	----------	--------------	----------

- * Replace eave fascia board as needed on structure
- * Install three (3) new painted slant back attic vents

Residence #4 (roof is approximately 997 square feet):

- * Remove one (1) layer asphalt shingles and underlayment material, down to wood deck, and dispose of in legal landfill
- * Install new 1.5" - 2" colored metal drip edge at all rakes and eaves
- * Remove two (2) old heated vents and replace decking
- * Install a layer of synthetic underlayment over wood decking
- * Install 50 year Malarkey Legacy shingles complete with all starter and ridge
- * Install one (1) new rubber pipe flashing, one (1) metal pipe flashing, and seal all penetrations
- * Replace eave fascia board as needed on structure

Garage Building #5 (roof is approximately 1,078 square feet):

- * Remove one (1) layer asphalt shingles and underlayment material, down to wood deck, and dispose of in legal landfill
- * Install new 1.5" - 2" colored metal drip edge at all rakes and eaves
- * Replace any additional roof decking if needed
- * Install a layer of synthetic underlayment over wood decking
- * Install 50 year Malarkey Legacy shingles complete with all starter and ridge

Contractor will provide all tools, equipment, supplies, and temporary facilities required to complete the work. Provide Agency Representative with proposed work schedule prior to beginning work. Remove and dispose of any necessary roofing components. Cover exposed or unfinished project to protect building interior from water or weather damage. At the completion of the project, remove all project related debris, materials, and equipment from staging, storage, and work areas. Repair any ruts left in sod areas. At completion of the work, conduct final inspection with Agency Representative. Complete any corrective work as directed. Provide manufacturer's written warranty documents to Agency Representative.

Total PO Amount

22,750.00

COMMENTS:

CAP Project No.: 18246

Oklahoma Department of Wildlife Conservation


AGY REQ: 3200001298

Agency Contact: Chris Cantellay
Phone: 580-474-2663 chris.cantellay@odwc.ok.gov

Vendor Contact: Andrew Lacks
Phone: 405-693-4628 groundzeroroofing1@gmail.com

CAP POC: Amber Thomas 405-521-4844 amber.thomas@omes.ok.gov

CAP Project Name: Replace roof on 5 structures at the Byron State Fish Hatchery

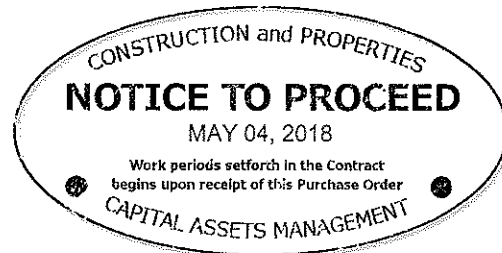

Authorized Signature

Empty box for authorized signature



Purchase Order

Dispatch via Print

Wildlife Conservation
OK DEPARTMENT OF WILDLIFE CONSERVATION
ACCOUNTING DEPARTMENT
PO BOX 53465
OKLAHOMA CITY OK 73152

Purchase Order 3209007194	Date 05/03/2018	Revision	Page 3
Payment Terms 0 Days	Freight Terms Free on board at Destination	Ship Via Common	
Buyer Amber Thomas (580)	Phone 405/521-2112	Currency USD	

Ship To: OK DEPARTMENT OF WILDLIFE CONSERVATION
BYRON STATE FISH HATCHERY
71082 JEFFERSON ROAD
BURLINGTON OK 73722

Bill To: OK DEPARTMENT OF WILDLIFE CONSERVATION
1801 N LINCOLN BLVD
OKLAHOMA CITY OK 731054998

Supplier: 0000465682
ANDREW LACKS
PO BOX 1272
NEWCASTLE OK 73065-1272

Tax Exempt? Y **Tax Exempt ID:** 736017987

Line-Sch	Cat CD	Item Id	Description	Quantity	UOM	PO Price	Extended Amt	Due Date
----------	--------	---------	-------------	----------	-----	----------	--------------	----------

Division: 2100001
Area: 000
State

PROJECTS UNDER STATUTORY AMOUNT
AWARD OF CONSTRUCTION CONTRACT PURSUANT TO O.S. 61 § 103.B. FOR PROJECTS UNDER THE STATUTORY AMOUNT.

Authorized Signature